





## **BOMBAS 4" BS PUMPS 4" BS**



# BOMBA 4" (SERIE BS) - PUMP 4" (BS SERIES)

## CURVAS DE CARACTERÍSTICAS - CHARACTERISTICS CURVES

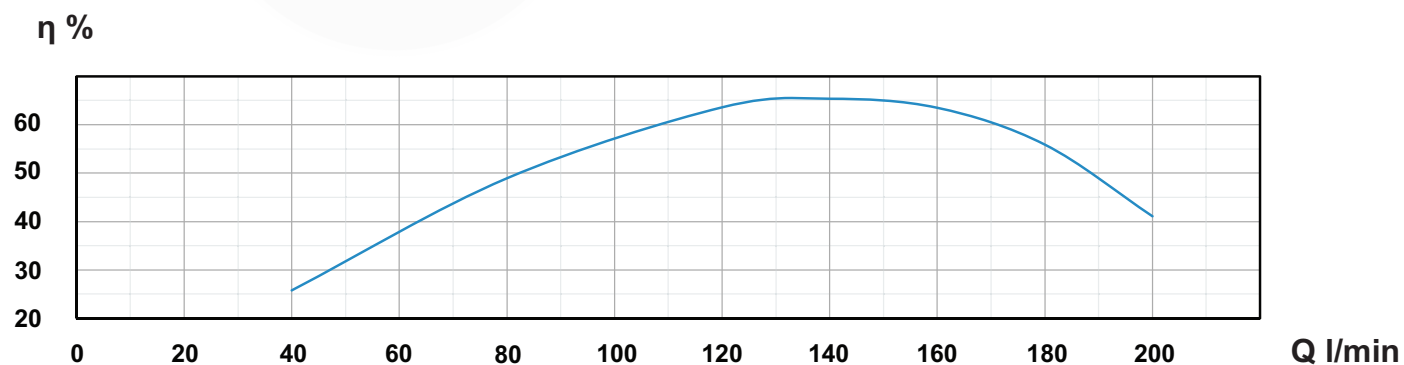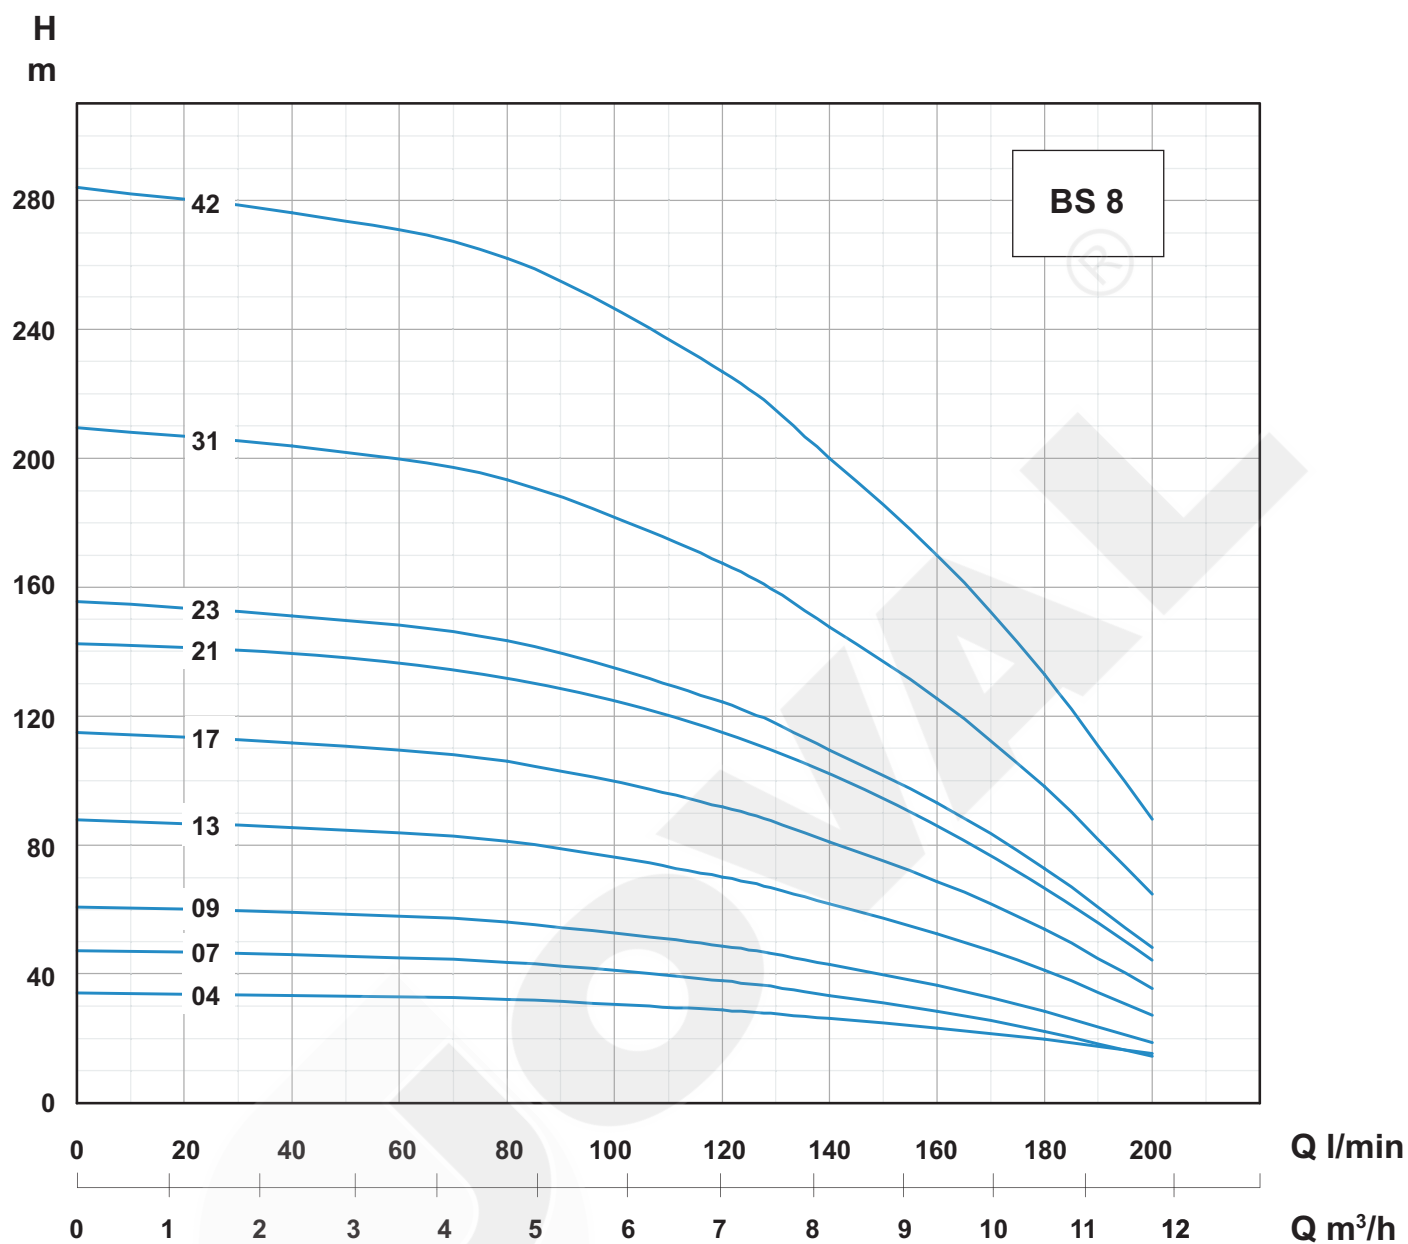

# BOMBA 4" (SERIE BS) - PUMP 4" (BS SERIES)

## CARACTERÍSTICAS - CHARACTERISTICS

| Modelo | Motor |     |        |        | Q - Caudal - Flow |       |     |     |     |    |     |     |     |     |     |     |     |     |      |     |     |     |
|--------|-------|-----|--------|--------|-------------------|-------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|-----|-----|
|        | kW    | HP  | 1~230V | 3~400V | m³/h              | 0     | 1,2 | 1,8 | 2,4 | 3  | 3,6 | 4,2 | 4,8 | 5,4 | 6   | 7,2 | 8,4 | 9,6 | 10,8 | 12  | 15  |     |
| Model  |       |     |        | A      | A                 | l/min | 0   | 20  | 30  | 40 | 50  | 60  | 70  | 80  | 90  | 100 | 120 | 140 | 160  | 180 | 200 | 250 |
| BS8 04 | 0,75  | 1   | 5,7    | 2,0    | H<br>m            | 27    |     |     |     | 26 | 26  | 25  | 25  | 24  | 23  | 22  | 19  | 16  | 13   | 8   |     |     |
| BS8 07 | 1,1   | 1,5 | 8,4    | 2,8    |                   | 47    |     |     |     |    | 46  | 45  | 45  | 44  | 43  | 41  | 38  | 33  | 28   | 22  | 15  |     |
| BS8 09 | 1,5   | 2   | 10,7   | 3,9    |                   | 61    |     |     |     |    | 59  | 58  | 57  | 56  | 55  | 53  | 49  | 43  | 36   | 29  | 19  |     |
| BS8 13 | 2,2   | 3   | 14,7   | 5,5    |                   | 88    |     |     |     |    | 85  | 84  | 83  | 81  | 79  | 76  | 70  | 62  | 53   | 41  | 27  |     |
| BS8 17 | 3     | 4   |        | 7,5    |                   | 115   |     |     |     |    | 111 | 110 | 108 | 106 | 103 | 100 | 92  | 81  | 69   | 54  | 36  |     |
| BS8 21 | 3,7   | 5   |        | 9,0    |                   | 142   |     |     |     |    | 137 | 135 | 133 | 131 | 128 | 123 | 114 | 100 | 85   | 67  | 44  |     |
| BS8 23 | 4     | 5,5 |        | 9,9    |                   | 156   |     |     |     |    | 150 | 148 | 146 | 143 | 140 | 135 | 124 | 110 | 93   | 73  | 48  |     |
| BS8 31 | 5,5   | 7,5 |        | 12,6   |                   | 210   |     |     |     |    | 202 | 200 | 197 | 193 | 188 | 182 | 168 | 148 | 125  | 98  | 65  |     |
| BS8 42 | 7,5   | 10  |        | 17,1   |                   | 284   |     |     |     |    | 273 | 271 | 268 | 262 | 255 | 247 | 227 | 200 | 170  | 133 | 88  |     |

Q - Caudal  
- Flow

H - Potência nominal do motor  
- Rated motor power output

| Modelo | Peso   | Altura | Saída  |
|--------|--------|--------|--------|
| Model  | Weight | Height | Salida |
|        | kg     | mm     | Outlet |
| BS8 04 | 2,8    | 299    | 2"     |
| BS8 07 | 3,3    | 389    |        |
| BS8 09 | 3,9    | 449    |        |
| BS8 13 | 4,3    | 610    |        |
| BS8 17 | 6,3    | 730    |        |
| BS8 21 | 7,5    | 891    |        |
| BS8 23 | 8,2    | 951    |        |
| BS8 31 | 10,7   | 1232   |        |
| BS8 42 | 14,2   | 1603   |        |

